


## 10W 超薄投光灯规格书


### 10W Super Slim Floodlight Specification

灯具名称(Lamp name): 超薄投光灯 Super Slim Floodlight	外形尺寸(Dimensions): 参考超薄线描图	型号(Model): LXFL-0101	
额定功率 Rated power	11W	LED 颗数 LED Quantity	27 (PCS)
额定输入电压(Rated input voltage)	180-300V AC	显色指数 Color Index	≥80
输出电压 Output Voltage	256-260V DC	色温 Color Temperature	2700-6500 (K)
工作频率 Operating Frequency	47-63HZ	光束角 Beam Angle	≥120°
功率因数(PFC) Power Factor	≥0.9	光通量(LM) Luminous	≥890LM
工作温度(°C) Operating temperature	-20~+45	灯具材料 Material	铝+铁+玻璃 Aluminum + Iron + Glass
工作湿度(°C) Working Humidity	10%~90%	寿命(H)Ta=25°C Lifetime	≥20000
存储温度(°C) Storage temperature	-20~+85	成品重量(KG) Net Weight	350g
LED 封装方式 Package	SMD 2835 0.5W	防护等级 Ingress Protection	IP65

### 外形尺寸(Dimension):

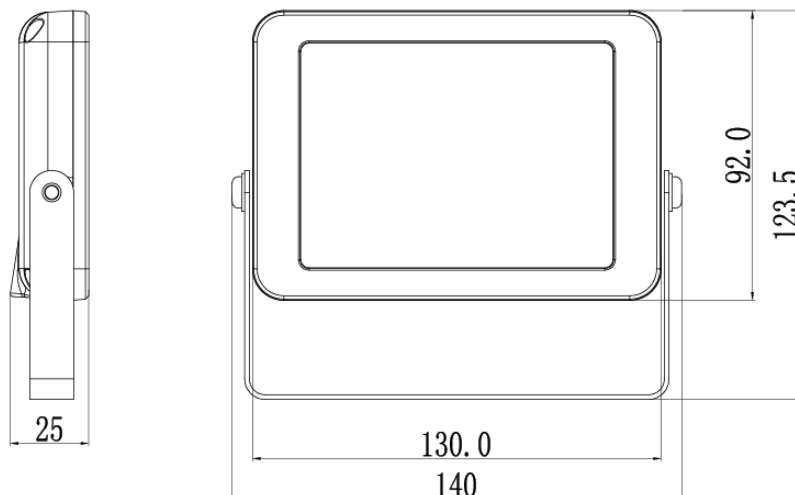

**Spectrum Test Report**

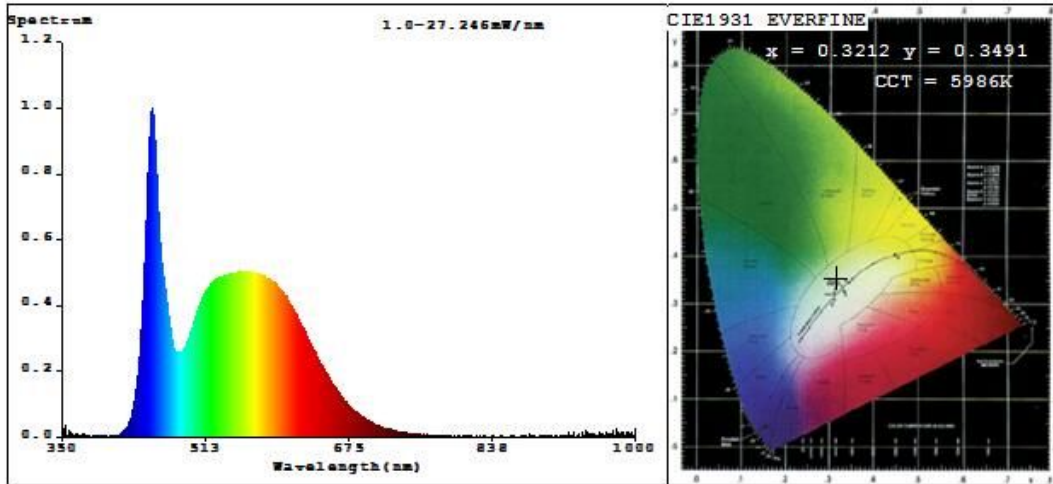

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3212$   $y=0.3491/u'=0.1963$   $v'=0.4799$   
 CCT=5986K(Duv=0.0091) Dominant WL:Ld =509.9nm Purity=3.8%  
 Ratio:R=13.4% G=81.2% B=5.4% Peak WL:Lp=453.4nm FWHM=21.4nm  
 Render Index:Ra=81.5 CRI=73.7 AvgR=73.6  
 R1 =78 R2 =87 R3 =93 R4 =79 R5 =79 R6 =83 R7 =87  
 R8 =65 R9 =0 R10=70 R11=78 R12=54 R13=81 R14=97 R15=72

**Photo Parameters:**

Flux = 890.8 lm Eff. : 84.52 lm/W Fe = 2.780 W

**Electrical parameters:**

V = 220.10 V I = 0.05000 A P = 10.54 W PF = 0.9470  
 LEVEL:OUT WHITE:OUT

Status: Integral T = 500 ms Ip = 20009 (31%)

Model:LIG-P0101  
 Tester:caizhuohua  
 Temperature:25.3Deg  
 Manufacturer:EVERFINE

Number:10w1  
 Date:2015-11-04 20:06:08  
 Humidity:65.0%  
 Remarks: