


## 20W 超薄投光灯规格书


### 20W Super Slim Floodlight Specification

灯具名称(Lamp name): 超薄投光灯 Super Slim Floodlight	外形尺寸(Dimensions): 参考超薄线描图	型号(Model): LXFL-0201	
额定功率 Rated power	22W	LED 颗数 LED Quantity	54 (PCS)
额定输入电压(Rated input voltage)	180-300V AC	显色指数 Color Index	≥80
输出电压 Output Voltage	256-260V DC	色温 Color Temperature	2700-6500 (K)
工作频率 Operating Frequency	47-63HZ	光束角 Beam Angle	≥120°
功率因数(PFC) Power Factor	≥0.9	光通量(LM) Luminous	≥1600LM
工作温度(°C) Operating temperature	-20~+45	灯具材料 Material	铝+铁+玻璃 Aluminum + Iron + Glass
工作湿度(°C) Working Humidity	10%~90%	寿命(H)Ta=25°C Lifetime	≥20000
存储温度(°C) Storage temperature	-20~+85	成品重量(KG) Net Weight	745g
LED 封装方式 Package	SMD 2835 0.5W	防护等级 Ingress Protection	IP65

### 外形尺寸(Dimension):

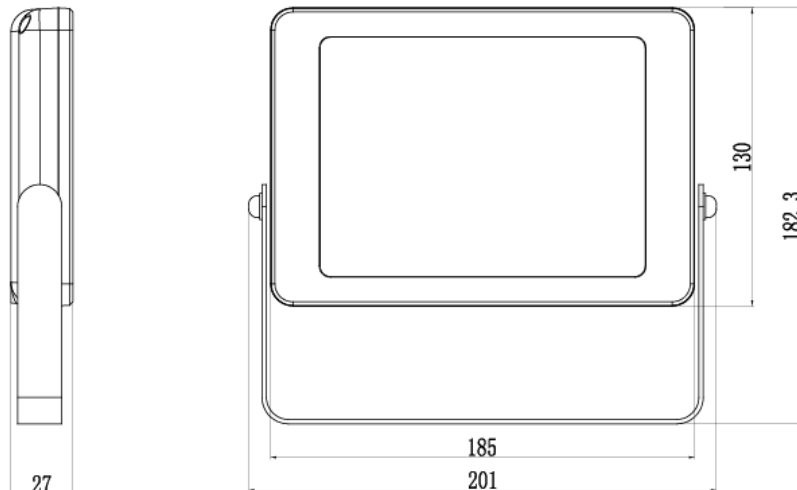

**Spectrum Test Report**

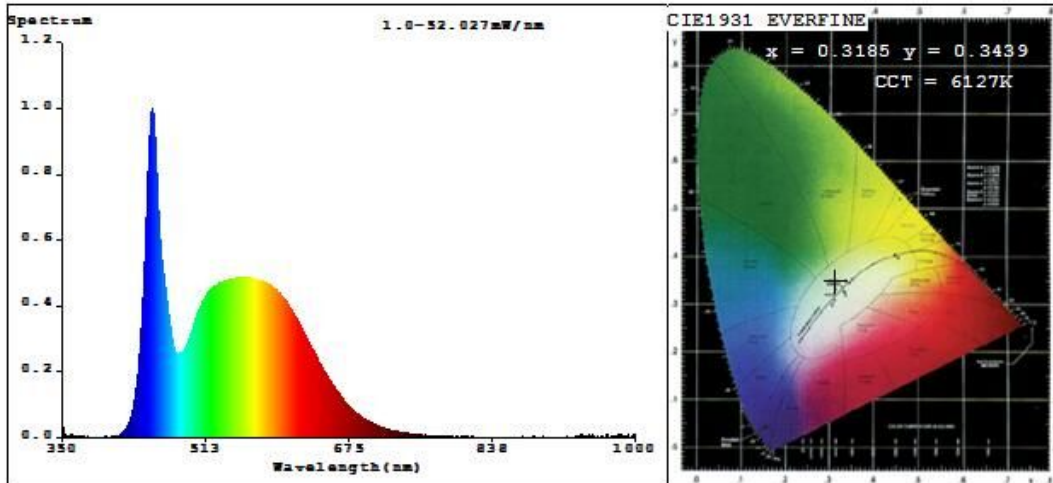

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3185$   $y=0.3439$   $u'=0.1964$   $v'=0.4769$   
 CCT=6127K(Duv=0.0078) Dominant WL:Ld =501.1nm Purity=4.5%  
 Ratio:R=13.4% G=81.0% B=5.6% Peak WL:Lp=452.4nm FWHM=21.9nm  
 Render Index:Ra=82.5 CRI=74.8 AvgR=74.7  
 R1 =80 R2 =88 R3 =93 R4 =80 R5 =80 R6 =84 R7 =88  
 R8 =67 R9 =1 R10=72 R11=79 R12=56 R13=82 R14=97 R15=74

**Photo Parameters:**

Flux = 1652 lm Eff. : 78.33 lm/W Fe = 5.214 W

**Electrical parameters:**

V = 220.10 V I = 0.1010 A P = 21.09 W PF = 0.9480  
 LEVEL:OUT WHITE:ANSI\_6500K

Status: Integral T = 500 ms Ip = 38020 (58%)

Model:LIG-P0201  
 Tester:caizhuohua  
 Temperature:25.3Deg  
 Manufacturer:EVERFINE

Number:20w1  
 Date:2015-11-04 20:12:01  
 Humidity:65.0%  
 Remarks: