


30W 超薄投光灯规格书


30W Super Slim Floodlight Specification

灯具名称(Lamp name): 超薄投光灯 Super Slim Floodlight	外形尺寸(Dimensions): 参考超薄线描图	型号(Model): LXFL-0301	
额定功率 Rated power	33W	LED 颗数 LED Quantity	54 (PCS)
额定输入电压(Rated input voltage)	180-300V AC	显色指数 Color Index	≥80
输出电压 Output Voltage	256-260V DC	色温 Color Temperature	2700-6500 (K)
工作频率 Operating Frequency	47-63HZ	光束角 Beam Angle	≥120°
功率因数(PFC) Power Factor	≥0.9	光通量(LM) Luminous	≥2900LM
工作温度(°C) Operating temperature	-20~+45	灯具材料 Material	铝+铁+玻璃 Aluminum + Iron + Glass
工作湿度(°C) Working Humidity	10%~90%	寿命(H)Ta=25°C Lifetime	≥20000
存储温度(°C) Storage temperature	-20~+85	成品重量(KG) Net Weight	1350g
LED 封装方式 Package	SMD 2835 1W	防护等级 Ingress Protection	IP65

外形尺寸(Dimension):

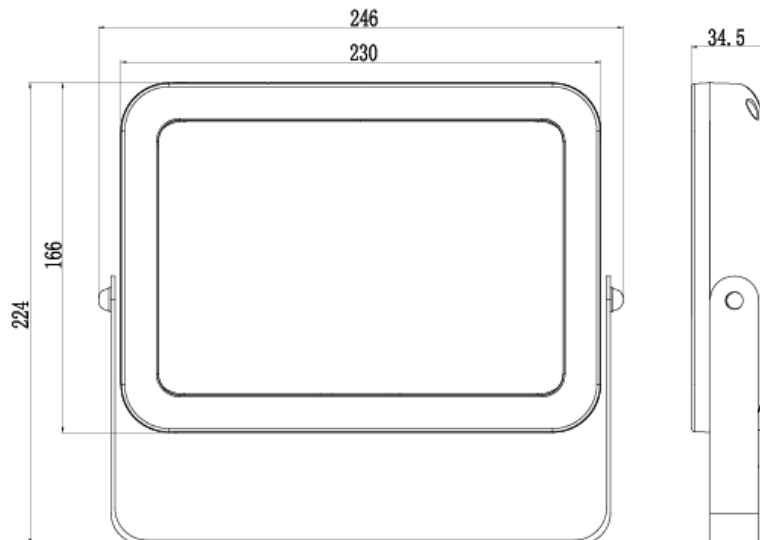

Spectrum Test Report

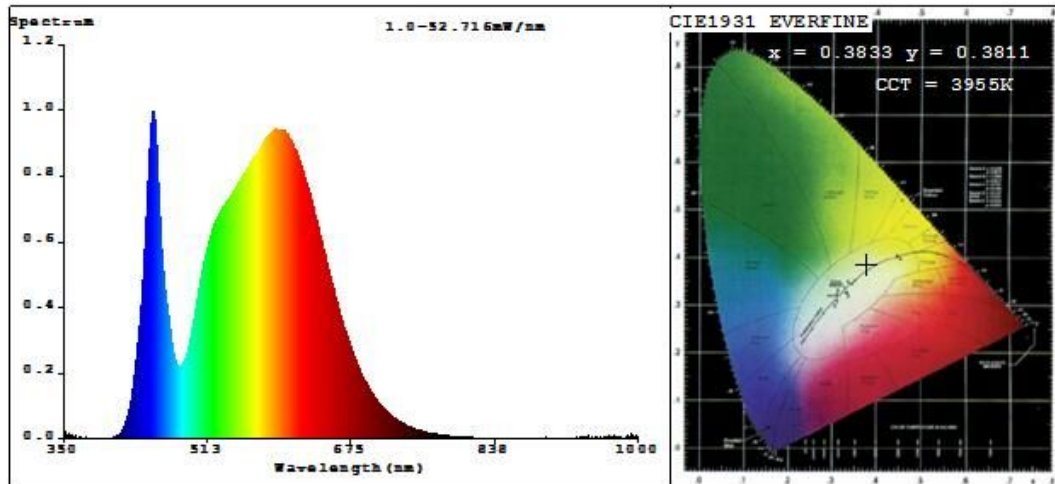

Color Parameters:

Chromaticity Coordinate: $x=0.3833$ $y=0.3811/u'=0.2253$ $v'=0.5039$
 CCT=3955K(Duv=0.0012) Dominant WL:Ld =578.6nm Purity=29.4%
 Ratio:R=18.3% G=78.5% B=3.2% Peak WL:Lp=451.3nm FWHM=23.4nm
 Render Index:Ra=82.1 CRI=75.2 AvgR=75.2
 R1 =81 R2 =87 R3 =92 R4 =82 R5 =80 R6 =82 R7 =87
 R8 =66 R9 =11 R10=69 R11=80 R12=58 R13=82 R14=95 R15=75

Photo Parameters:

Flux = 2915 lm Eff. : 96.79 lm/W Fe = 8.899 W

Electrical parameters:

V = 220.10 V I = 0.1430 A P = 30.12 W PF = 0.9540
 LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 500 ms Ip = 51945 (78%)

Model:LIG-P0301
 Tester:caizhuohua
 Temperature:25.3Deg
 Manufacturer:EVERFINE

Number:30w1
 Date:2015-11-04 17:23:25
 Humidity:65.0%
 Remarks: